
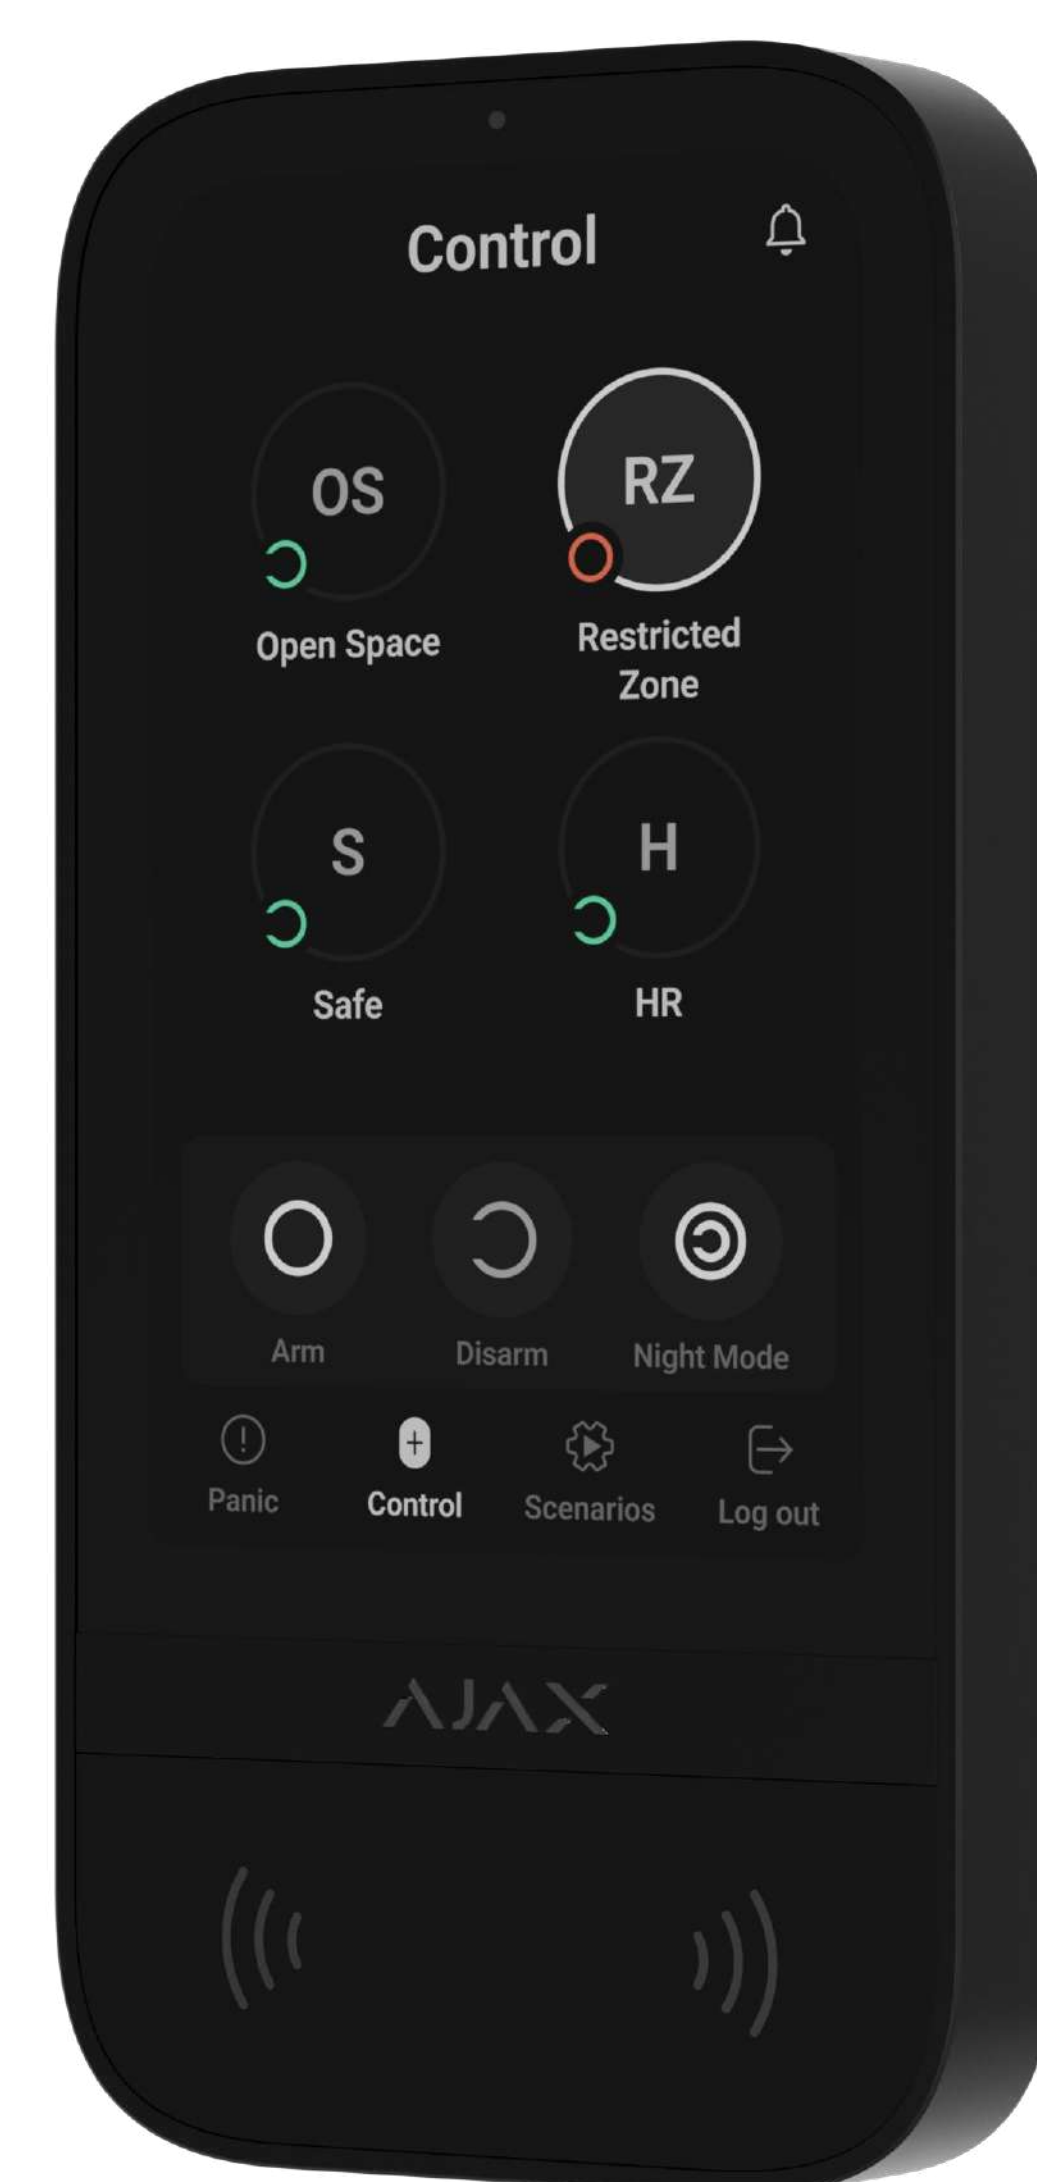



KeyPad TouchScreen Jeweller

Wireless keypad with a touch screen supporting authentication via Pass, Tag, smartphones, and codes




Intelligent security and automation management

KeyPad TouchScreen Jeweller is designed for intuitive and convenient security system control. The graphical interface, sound notifications, and LED indication of the keypad ensure that users' commands and the system's responses are delivered without fail. If a malfunction is detected during the integrity check, the keypad clearly indicates the cause. This way, users are always aware of the system state and any necessary actions.

Key features

- Easy security group management
- Control tab for automation devices with toggles indicating the current device state¹
- Sound and LED indication for alarms, opening doors (Chime), delays when entering/leaving, and other events
- Keypad activation when a user approaches the device and during delays when entering
- Automatic backlight brightness adjustment
- On-screen notification specifying the cause of a malfunction when arming the system

Three fast and secure authentication methods

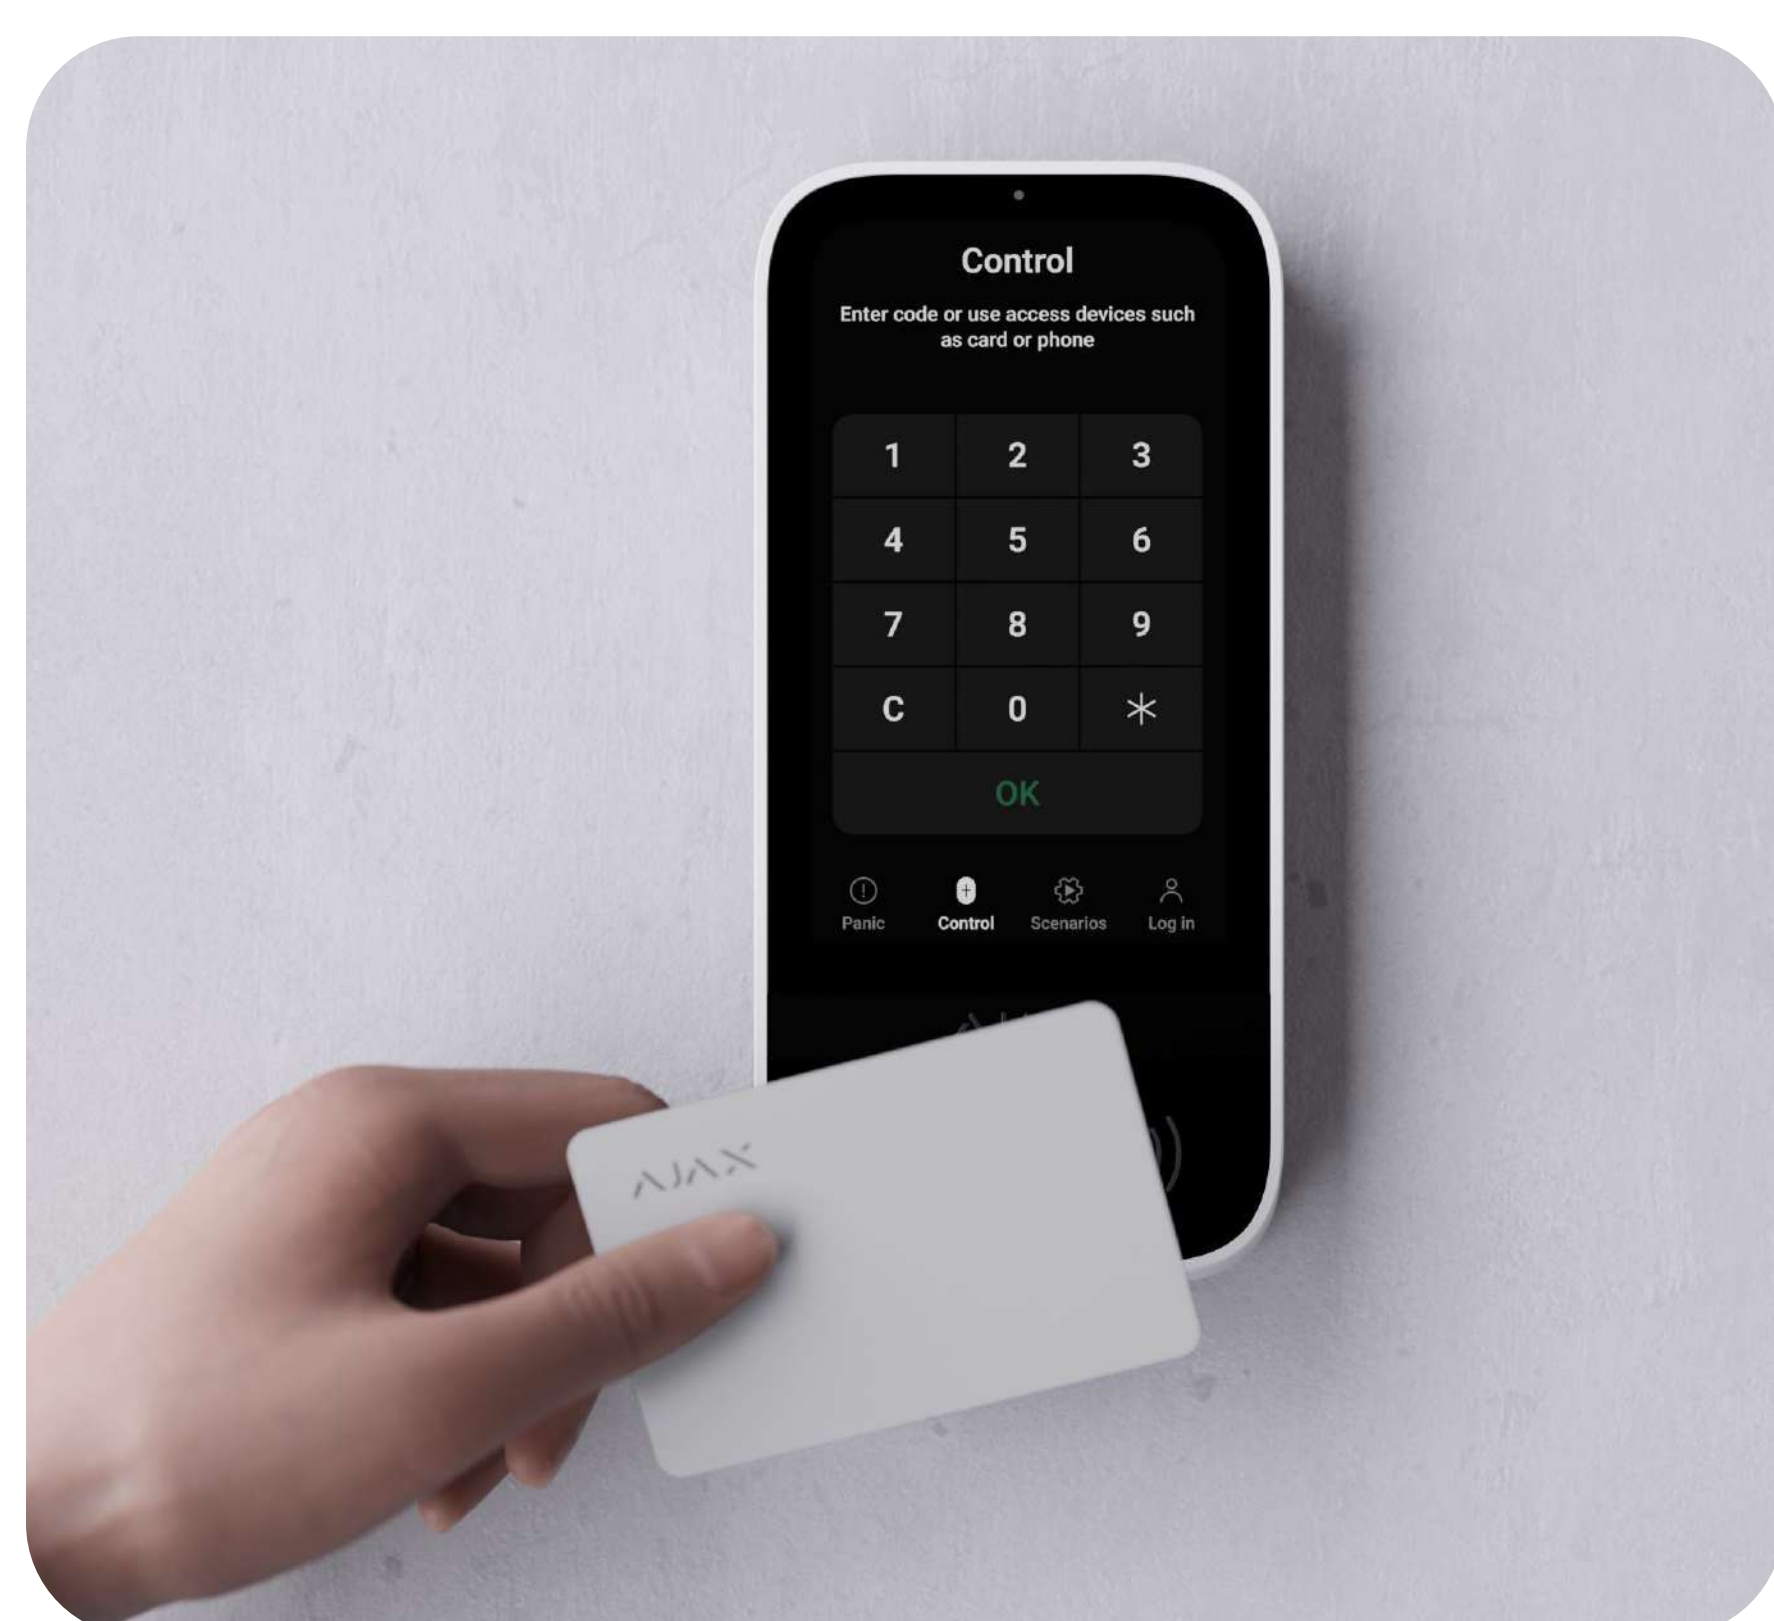

Pass card or Tag key fob



Smartphone




Codes




All set in case of emergency

- Keypad auto-locking when someone tries to guess the code
- Duress codes to simulate system disarming and send a silent alarm to the security company
- Protection against authentication via unauthorized access devices
- Three emergency buttons: panic, fire, and auxiliary alert



JEWELLER



WINGS


communication technologies

- Up to 1,700 m (5,550 ft) of radio communication between the keypad and a hub or range extender in an open space
- Data encryption throughout the transmission process
- Regular polling to display the current device state
- Frequency hopping to prevent radio interference and jamming



Complex sabotage protection

- Tamper alarm to notify of keypad dismantling
- Keypad authentication to prevent spoofing
- Detection of communication loss between the keypad and a hub



Easy installation and setup

- Pairing with a hub by scanning the QR code
- Remote control and configuration via Ajax apps
- SmartBracket mounting panel for easy installation without disassembling the device enclosure
- Over-the-air firmware updates²

Compliance EN 50131 (Grade 2) PD 6662:2017 INCERT UL Compatibility Hubs Hub 2 (2G) Jeweller Hub 2 (4G) Jeweller Hub 2 Plus Jeweller Hub Hybrid (2G) Hub Hybrid (4G) Hub BP Jeweller Range extenders ReX 2 Jeweller	Communication with a hub or range extender Jeweller and Wings communication technologies Frequency bands 866.0–866.5 MHz 868.0–868.6 MHz 868.7–869.2 MHz 905.0–926.5 MHz 915.85–926.5 MHz 921.0–922.0 MHz Depends on the sales region Communication range up to 1,700 m up to 5,550 ft In an open space	Features Contactless access up to 200 cards and key fobs Bluetooth low energy (BLE) support Access codes Duress codes Emergency buttons Panic, fire, auxiliary alert Fire alarm muting	Display Type IPS, capacitive touch screen Diagonal 5" Resolution 480 × 854 px
Power supply Battery 6 × AA battery (pre-installed) Battery life up to 1.5 years Optional external power supply 10.5–14 V ¹ , up to 0.5 A When external power is connected, the batteries operate as a backup power supply.	Installation Operating temperature range from –10 °C to +40 °C from 14 °F to 104 °F Operating humidity up to 75%	Enclosure Color black, white Dimensions 171.5 × 82.1 × 26 mm 6.75" × 3.23" × 1.02" Weight 327 g 11.53 oz Tamper	Complete set KeyPad TouchScreen Jeweller 6 × AA battery (pre-installed) SmartBracket mounting panel Installation kit Quick start guide

¹ When KeyPad TouchScreen Jeweller controls automation devices that operate in the bistable mode.

² To receive over-the-air updates, KeyPad TouchScreen Jeweller needs to be connected to the external power supply.



For detailed information, scan the QR code or follow the link:

ajax.systems/support/devices/keypad-touchscreen



support@ajax.systems



@AjaxSystemsSupport_Bot



ajax.systems