

KNIPEX Quality – Made in Germany



KNIPEX ErgoStrip® L

Universal Stripping Tool

New: ErgoStrip® L for left-handers


Ideal for NYM, coax and data cable:
slitting of the sheathing, dismantling
and stripping with just one tool

Particularly
ergonomic handling
due to innovative
pistol handle design

Better accessibility thanks to
tapered tool ends

Precision ground
adapted blades for
wire stripping

Cable stripping knife for
the simple slitting of the
cable sheathing

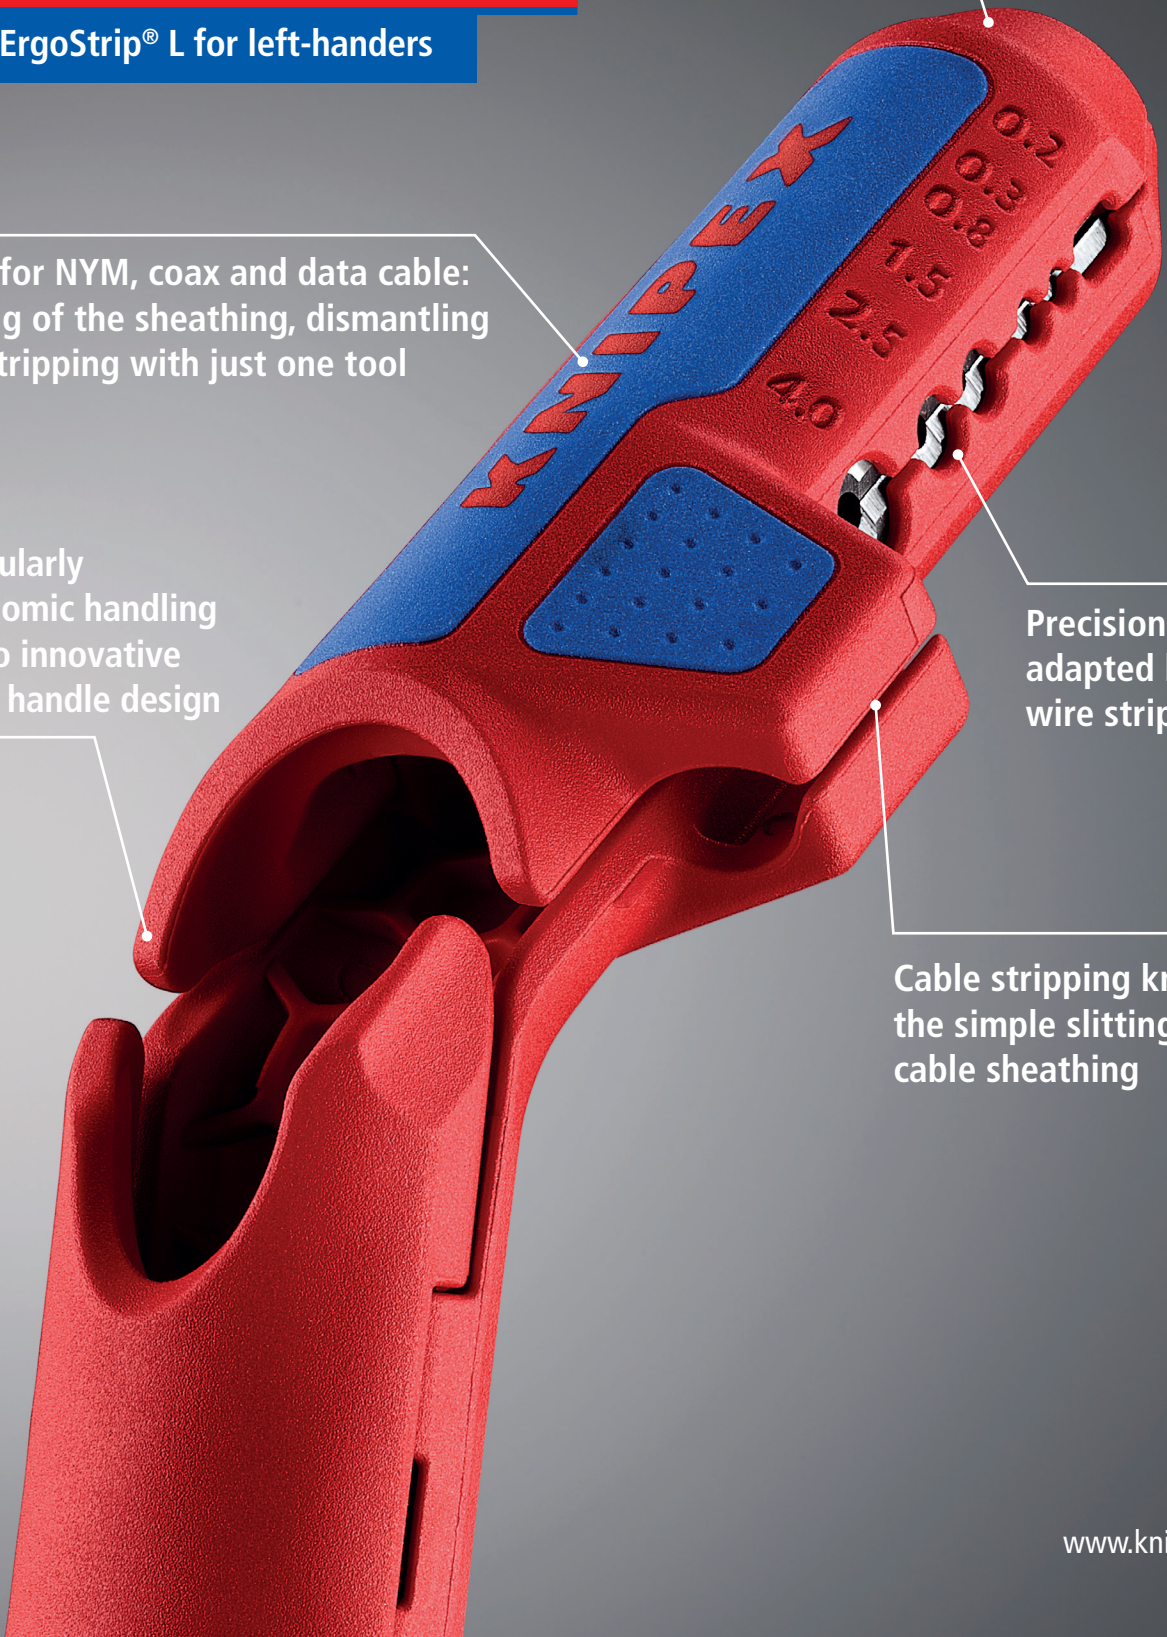



KNIPEX ErgoStrip® L
Universal Stripping Tool

New: ErgoStrip® L for left-handers

16
95

- ▶ For the fast and precise dismantling and stripping of all common round and damp-proof installation cables (e.g. NYM cable 3 x 1.5 mm² up to 5 x 2,5 mm²), data cable (e.g. twisted pair) and coax cable
- ▶ Innovative, ergonomic pistol grip design for easy cutting, stripping and longitudinal cut of the sheath
- > Conically slimmed down tool ends for better access in confined areas
- > Stripping device for cross-sections 0.2/0.3/0.8/1.5/2.5/4 mm²
- > Simplified insertion of single conductors for wire stripping using locating ridges
- > Easy insertion of coax and data cable thanks to opening aid
- > Multi-component design with a soft plastic zone for comfortable use and a secure grip
- > Housing made from stable glass fibre reinforced plastic



16 95 01 SB
version for right-handers

PAT. PEND.


16 95 02 SB
version for left-handers




Stripping of a NYM cable



With concealed cutter in overhanging thumb rest on the side for convenient lengthwise cut



Practical locator simplifies the insertion of single conductors for stripping

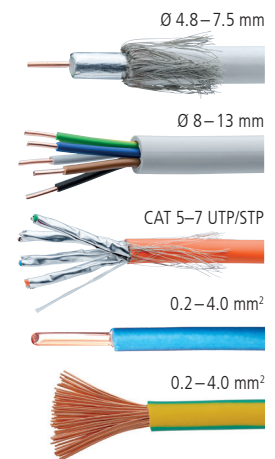

Stripping of a data cable



Stripping of a coax cable



Stripping of a coax cable

Product video



Article No.	EAN 4003773-	↔ mm		Stripping capacities				⚖ g
				round cable Ø mm	conductors and strands mm ²	data cable	coax cable Ø mm	
16 95 02 SB	082910	135	MM	8 - 13	0.2 - 4	CAT 5 - 7, Twisted pair (UTP/STP)	4.8 - 7.5	40
16 95 01 SB	079927	135	MM	8 - 13	0.2 - 4	CAT 5 - 7, Twisted pair (UTP/STP)	4.8 - 7.5	40