

8 KEYLOCKFOR VARI-DEPTH ROTARY HANDLE - (STAR KEY CAT.NO 0 262 93/FLAT KEY CAT.NO 0 262 94 OR EUROLOCK KEY CAT.NO 0 262 92 OR 4 228 04/805

This accessory allows the DPX³ to be locked in the open position → perform a consignment operation.

Composition of the Cat.no 0 262 93 :



Make the mounting as shown in the instructions and check the correct operation of the whole: the key can be removed with the handle in position "0", it cannot be with the handle in position "I".



This lock can receive padlocks (3 maximum from 5mm to 8 mm).

Picture of the set mounted with the handle on "0" and the key removed :



■ **Summary :**

- 0 262 93 : each reference comes with 1 single star key
- 0 262 94 : each reference includes 1 single flat key
- 4 228 04 : each reference includes 1 flat key EL 43525 common to all Cat.no 4 228 04
- 4 228 05 : each reference includes 1 flat key EL 43363 common to all Cat.no 4 228 05

9 LOCKING FOR ROTARY HANDLE (CAT.NO 0 262 25)


Mounting identical to DPX³ 630 (see pages 94 and 95).

10 CAGE TERMINAL (X1) CAT.NO 0 262 69/70

Composition of the Cat.no 0 262 69:



- Insert the 2 screws respecting the 2 different lengths and tighten the cage terminal on the product to the torque of 14 N.m. :

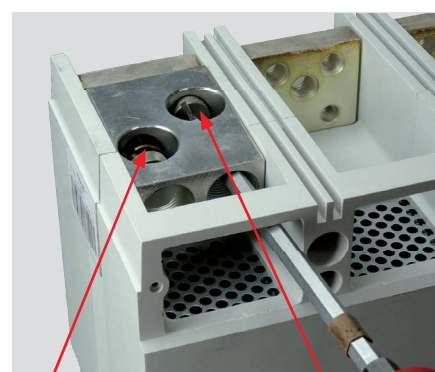

Location of the large screw

Location of the small screw

- Put the cables in place and tighten the screws to the torque of 36 N.m. (10 mm Allen key).



■ **Cable characteristics :**

- Stripping length → 25 mm
- Maximum cable Ø → 22 mm
- Maximum copper/aluminium section :
 - 2 x 240 mm² rigid
 - 2 x 185 mm² flexible
- Copper/aluminium minimum section :
 - 2 x 120 mm² rigid
 - 2 x 95 mm² flexible