Evoline 19" free-standing network cabinets

High load rating and mounted chassis

... up to 1 000 kg

HIGH LOAD RATING AND MOUNTED CHASSIS

- Permissible load 1 000 kg
- Support profiles made of 24 times folded steel
- Textured polyester coating providing excellent resistance to corrosion and scratches

HIGH FLEXIBILITY

- Assembled, fully dismantlable chassis
- Baying cabinets
- Double U marking on front and back 19" rails
- Removable and lockable back and side panels
- Wide selection of front and rear doors
- 19" rails adjustable in depth
- Door opens a maximum 120°

VARIOUS ACCESSORIES

- Cable entries with a dust protection brush included in standard configuration
- High density vertical channels for comfortable vertical routing of big patch cord bundles
- Cable rings for vertical patch cord management in 600 mm wide cabinets
- Various types of shelves and PDU

DIFFERENT SIZES

- 22U - 47U
- 600 and 800 mm wide
- 600 to 1 000 mm deep

Evoline Standard cabinet configuration

Double front doors as a standard for 800 mm wide cabinets

600 mm width

800 mm width

FRONT

Tempered smoked-safety glass door.
600 mm width cabinets – single front door with a handle.
800 mm width cabinets – double front doors with 2 cylinder locks.

BACK

Back side with cylinder lock. Additional securing with plastic latches.
42U cabinets equipped with removable cable entry.

CABLE ENTRIES AND VENTILATION

All cable entries are covered with a brush entries in a standard configuration.
600 mm width cabinets – one 55 x 300 mm entry on the top / one 80 x 300 mm entries at the bottom.
800 mm width cabinets – two 55 x 300 mm entires on top / three 80 x 300 entries at the bottom.
Standard racks accepts ventilation plates with 2 or 4 fans.
6-fan configuration is available upon reguest.



bottom



bottom



top



top



6 fans
upon request

EvoLine 19" free-standing network cabinets

door types and cabinet dimensions

Various EvoLine network cabinet configurations

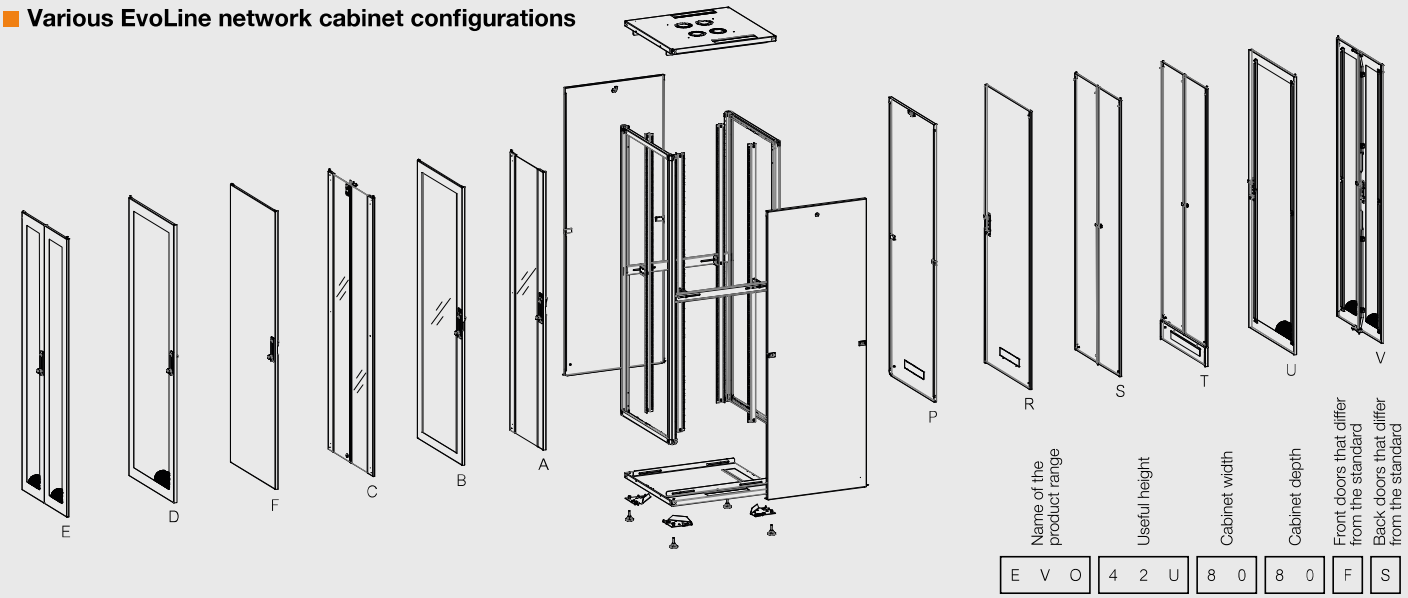

Door marking	Front door	600 mm wide cabinets	800 mm wide cabinets
A	Tempered glass door, partial metal frame	Standard	-
B	Tempered glass door, full metal frame	Optional	Optional
C	Double tempered glass doors, partial metal frame	-	Standard
D	63% perforated door with single-point locking	Optional	Optional
E	63% perforated double door with three-point locking	-	Optional
F	Full metal door	Optional	Optional

	Back door		
P	Full metal panel (no opening)	Standard	Standard
R	Full metal door (possible to open)	Optional	Optional
S	Double full metal door	-	Optional
T	Double full metal door, with separate cable entry	Optional	Optional
U	63% perforated door with single-point locking	Optional	Optional
V	63% perforated double door with three-point locking	-	Optional

* only 42U network cabinets have additional cable entry on the back panel

Dimensions

600 x 600 cabinets

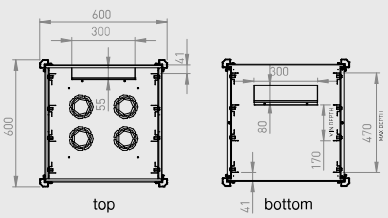

600 x 800 cabinets

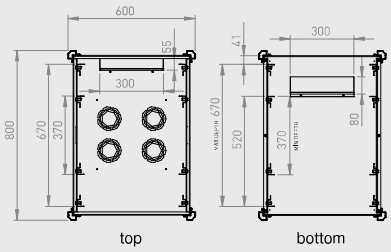

600 x 1 000 cabinets



800 x 600 cabinets

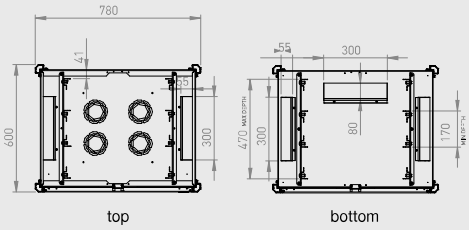

800 x 800 cabinets

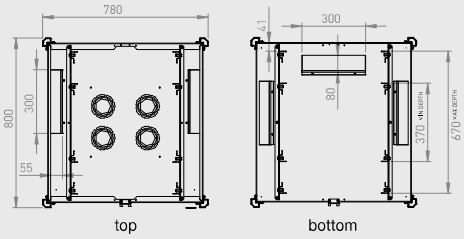
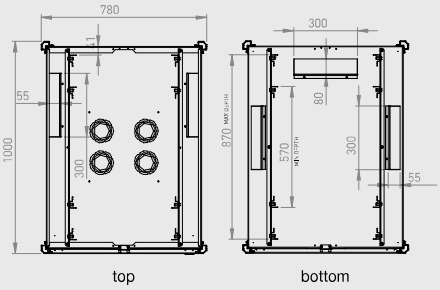
800 x 1 000 cabinets