



2330 G4 M73 PW19 30-42/4ML-840 ET

TOC: 6000682940

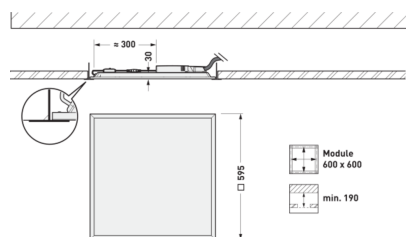

Product description

Luminaire type

Square recessed LED ceiling luminaire with prismatic PMMA cover. Version M73 (600 mm x 600mm).

Applications

Offices, Corridors, Foyers, Conference rooms, Retail areas, waiting zones.

Mounting methods

For system ceilings with exposed grids.

Optical system

PMMA cover with microprisms. With symmetric limited wide light distribution. Glare evaluation according to UGR rating (EN 12464-1) < 19. Glare evaluation according to UGR rating (EN 12464-1) < 19. Suitable for VDU workstations according to EN 12464-1 via limited luminance $L \leq 3000 \text{ cd/m}^2$ for beam angle above 65° all-round. Harmonious light effect due to homogeneously illuminated light emission.

LED system

Luminaire luminous flux adjustable in 2 steps (Multilumen). Luminaire luminous flux 2900 lm - 3600 lm, connected load 24 W - 31 W, Power Faktor $\lambda > 0,95$, maximum luminous efficiency of luminaire 121 lm/W. Light colour neutral white, correlated colour temperature (CCT) 4000 K, general colour rendering index (CRI) $R_a > 80$. Colour locus tolerance (initial MacAdam) $\leq 5 \text{ SDCM}$. Mean rated service life L70 ($t_q 25^\circ\text{C}$) = 50,000 h. Flicker: Pst LM ≤ 1.0 at full load. Stroboscopic effect: SVM ≤ 0.4 at full load.

Luminaire body

Luminaire body of aluminium. Surface coated white (similar to RAL 9016). Dimensions (L x W): 595 mm x 595 mm, luminaire height 32 mm. Safety class (EN 61140): I, protection rating (DIN EN 60529): IP20, Protection rating on room side: IP40, impact resistance level in accordance with IEC 62262: IK02, testing temperature of wire glow test in accordance with IEC 60695-2-11: . Permissible ambient temperature (ta): 25 °C . Weight: 2,2 kg.

Electrical version

With electronic control gear unit, switchable. The control gear unit is replaceable in accordance with the ecodesign requirements (VO (EU) 2019/2020). The luminaire complies with the fundamental requirements of applicable EU regulations and product safety legislation and bears the CE symbol. The luminaire is also ENEC-certified by an independent testing authority.

Disassembly instructions (PDF) for the product available at: <https://www.trilux.com/EcoDesign>

Product features and key data

Applications	Offices Corridors Foyers Conference rooms Sales rooms Waiting zones	
Luminaire type	Square recessed LED ceiling luminaire with prismatic PMMA cover.	
Mounting method	Recessed	
Luminaire optic	PMMA cover with microprisms.	
Light distribution curve	Wide reduced glare UGR19 (W19)	
FWHM	89,60 °	
Light Engine	Level 1	Level 4
Colour temperature	4000 K	4000 K
Rated luminous flux	3000 lm	4200 lm
Connected load	21,00 W	29,00 W

Product features and key data

Luminous efficacy	143 lm/W	145 lm/W
Rated service life	L80 (25 °C) = 50.000 h	
Colour rendering index	80	
Colour tolerance	5 SDCM	
Photobiological class	Group 0 - no risk	
Luminaire colour	RAL9016 Traffic white	
Luminaire body	Luminaire body of aluminium.	
Electrical version	With electronic control gear unit, switchable.	
Wire diameter	1,50 mm ²	
Connection method	Plug-in terminal	
Mains voltage	220 - 240 V	
Mains frequency	50/60 Hz	
Total harmonic distortion < %	14 %	
Protection rating	IP20	
Protection rating on room side	IP40	
Protection class	I	
Impact resistance (IK)	IK02	
Ambient temperature	25 °C	
Net length	595 mm	
Net width	595 mm	
Net height	32 mm	
Recess length	595 mm	
Recess width	595 mm	
Recess depth	190 mm	
Weight	2,2 kg	

Available accessories

Material	Description
6000877700	Suspension accessories for luminaires of the series: 2330 M73/M84... G4 .

Light Engine Data

Light Engine	Color temperature	Rated light current	Power supply value Typ	Luminous efficacy
Level 1	4000 K	3000 lm	21,00 W	143 lm/W
Level 2	4000 K	3400 lm	23,50 W	145 lm/W
Level 3	4000 K	3800 lm	26,50 W	143 lm/W
Level 4	4000 K	4200 lm	29,00 W	145 lm/W

EPREL - European Product Registry for Energy Labelling

Energy Efficiency Class

Model identifier

C

MPL-60x60-26.3W G1 40

For more sustainability in day-to-day business

New
packing



CO₂ OPTIMISED



NO PLASTIC



ONLY ONE MATERIAL



100% RECYCLABLE



www.trilux-twenty3.com/eco