

KNIPEX Quality – Made in Germany



KNIPEX Twistor16


Powerful – compact – high capacity range

Flexible due to 360° rotatable crimp head

Versatile due to particularly high capacity range from 0.14 to 16 mm²

Outstanding flexibility due to completely rotatable crimp head

Easy crimping due to toggle lever transmission

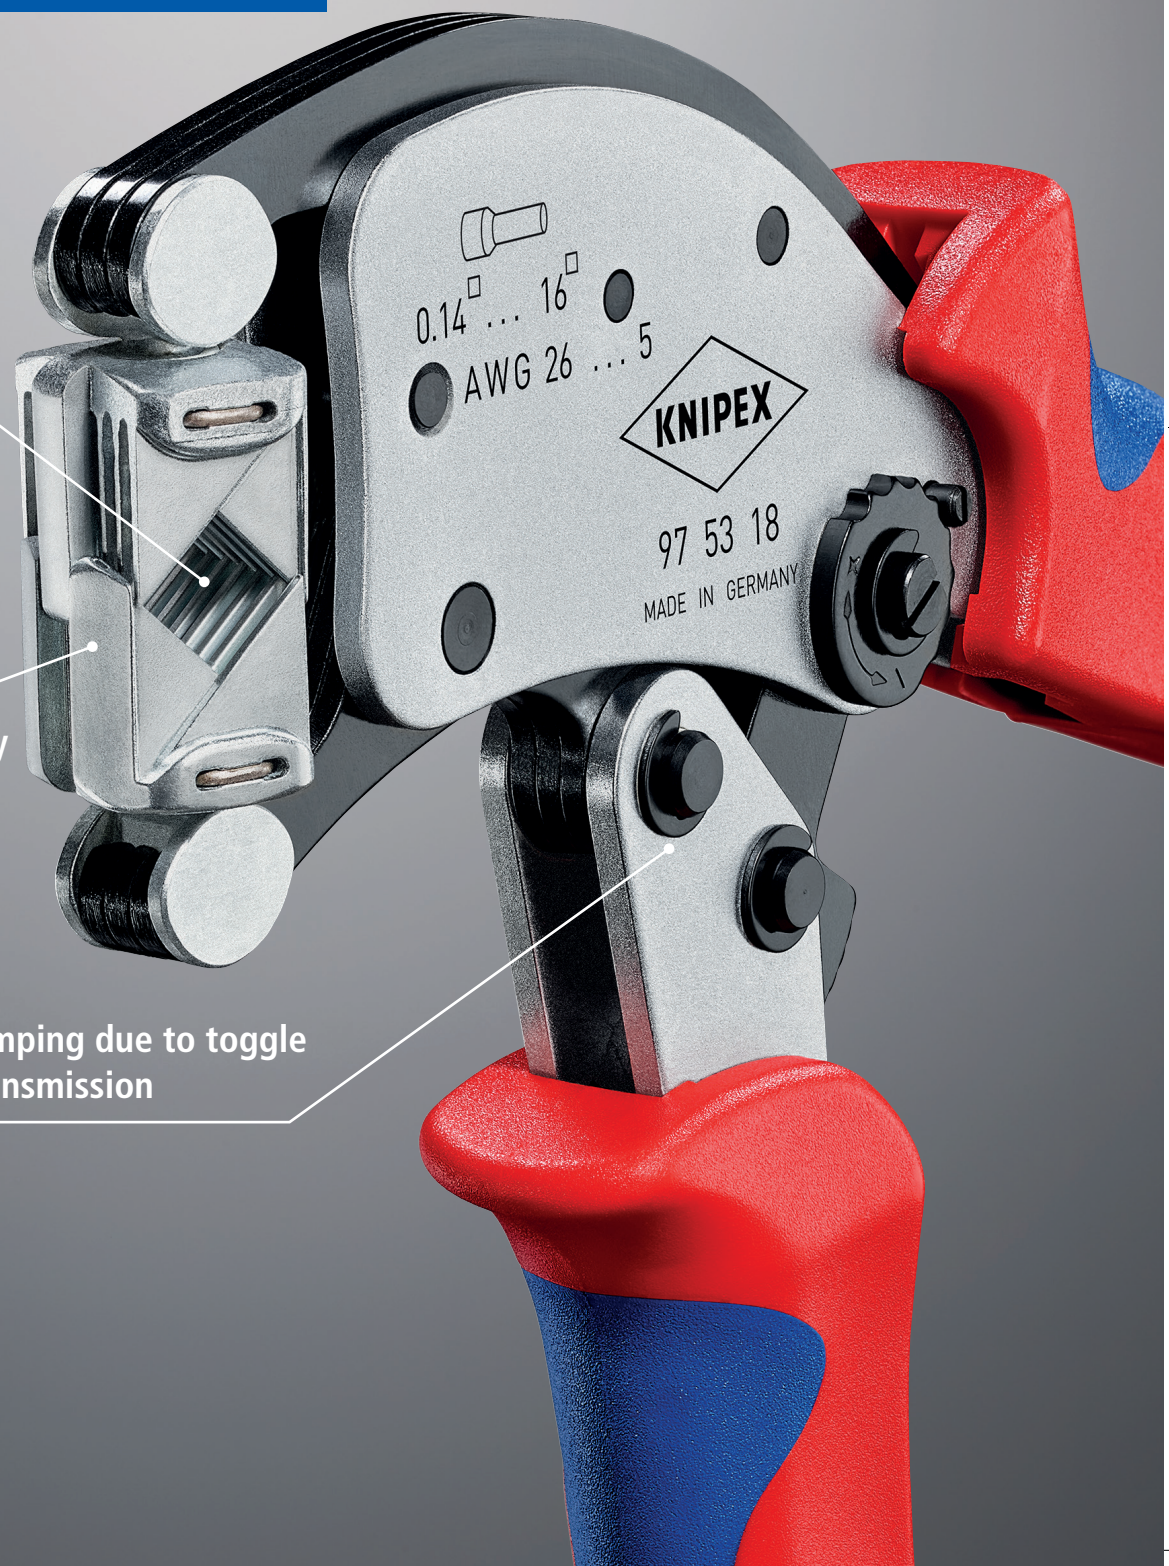



KNIPEX Twistor16

Self-adjusting crimping pliers for end sleeves (ferrules) with rotating crimp head


97

- ▶ Crimp head can be freely rotated 360°, with 8 locking positions
- ▶ Square crimp profile, high capacity range of 0.14 to 16 mm²
- ▶ End sleeves (ferrules) can be crimped from almost any working position

- > Crimping pliers adjust automatically to different cross-sections
- > Crimp opening accessible from both sides, extra-long end sleeves can be fed in
- > Crimping of twin end sleeves (ferrules) up to 2 x 6 mm² possible
- > Repetitive, high crimping quality due to integral lock (self-releasing mechanism)
- > Light and handy tool, manual force reinforced by toggle lever mechanism
- > Chrome vanadium electric steel in special quality, oil-hardened




97 53 18




Crimp head can be rotated 360°


Product video

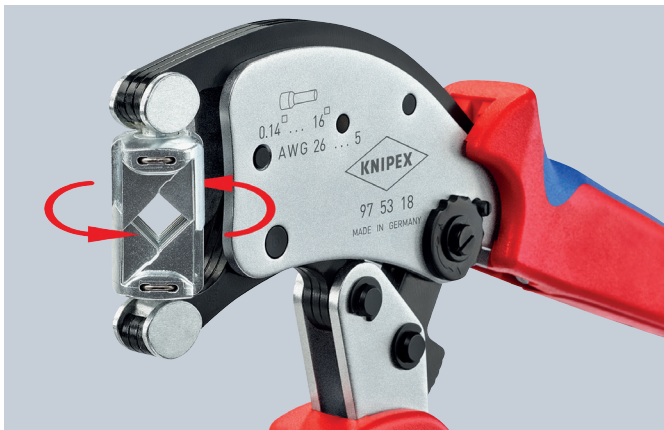

Crimp head can be rotated 360° for optimal accessibility, even in confined spaces

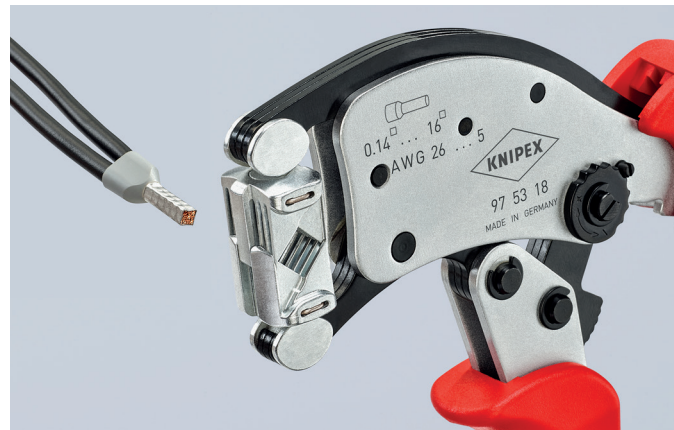

Twin end sleeves (ferrules) up to 2 x 6 mm² can be crimped without adjustment



Crimp end sleeves (ferrules) fully automatically within the capacity range of 0.14 to 16 mm²



Uniquely flexible: connectors can be inserted in the rotatable crimp head from almost any position



Article No.	EAN	↔ mm	Capacity mm ²	AWG	Number of crimping positions	⚖ g
97 53 18	082729	200	0.14 - 16	26 - 5	1	478
97 53 18 SB	082736	200	0.14 - 16	26 - 5	1	478